

**Axolight**

LA4868/90

## Axolight U-Light UL LED Ceiling / Wall Light

SOURCE: <https://www.davidvillagelighting.co.uk/product/Axolight-U-Light-UL-LED-Ceiling-Wall-Light/18072>

### PRODUCT DESCRIPTION


**Designer:** Timo Ripatti

### Axolight U-Light UL LED Ceiling / Wall Light

Timo Ripatti designed the U-Light Ceiling/ Wall Light for lighting brand Axolight. Based in Helsinki, Ripatti is accustomed to short winter days and understands the importance of interior lighting and the effect it has on our lives. He utilises this experience to create pieces that blends functionality requirements with the emotional requirements of light. The U-Light Ceiling/ Wall Light is a perfect example of this approach to design. Comprised of slender circles, available in multiple finishes, the U-Light is an elegant lighting solution for a wide range of spaces.

When illuminated, the U-Light Ceiling/ Wall Light casts a glare-free lighting that reflects off the wall, surrounding the light in a warm glow. This atmospheric lighting creates a comfortable ambience in any space, perfect for lounge areas, dining rooms, or hallways. The versatile nature of the design lends itself to customisation. Create unique installations by displaying multiple lights in clusters of altering sizes and finishes. In commercial spaces, utilise the U-Light Ceiling/ Wall Light in hotel lobbies, office spaces, or contemporary restaurants for a dynamic display that will leave an impactful impression.

**The U-Light UL Ceiling / Wall Light is available in fifteen bold finishes, including White, Blue, Red, Green, Yellow and Black. [Contact us](#) for more information and pricing.**

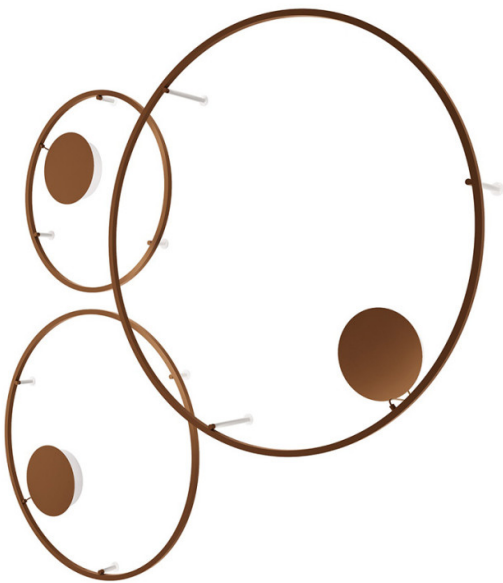

## PRODUCT SPECIFICATION

**Light Source:** **U-Light 90:** 63W (Standard) or 54W (Recessed), 3000K, 4904 Lumens  
**U-Light 120:** 86W (Standard) or 74W (Recessed), 3000K, 7354 Lumens  
**U-Light 160:** 125W (Standard) or 102W (Recessed), 3000K, 9900 Lumens

**IP Code:** 20

**Dimming:** Dimmable via 1-10v dimming systems. Please consult your electrician, additional wiring may be required on site.

**Dimensions:** **U-Light 90-** Ø 90 cm  
**U-Light 120 -** Ø 120 cm  
**U-Light 160 -** Ø 160 cm


Option between 10cm or 25cm depth

**Standard canopy:**

Ø 33 x 8.2 cm ceiling canopy

**Recessed canopy:**

Ø6.5cm, 4 cm depth ( Ø4.5cm hole, 10 cm min depth)

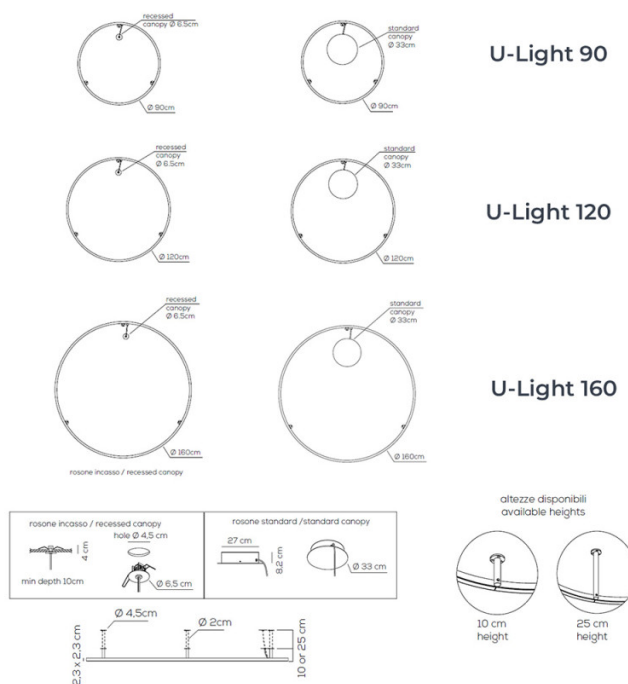

**For all sales and technical enquiries, please contact:**

+44 (0)114 263 4266

info@davidvillagelighting.co.uk

www.davidvillagelighting.co.uk